


# 6m width Polytunnel



50.8mm diameter high tensile steel with 1.5mm wall thickness

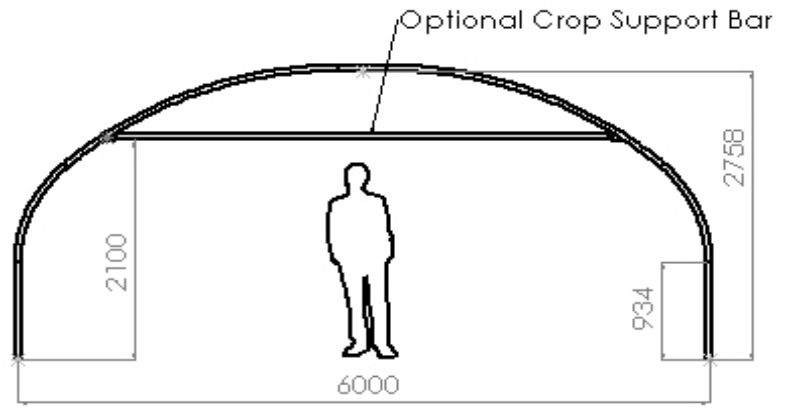

2mm thick steel adds 33% to frame strength



Facilitates fitting of a separate cover for the gable end, which removes pleats and folds



800 Gauge Polythene with anti-fog layer and 5 year UV guarantee

Steel Frame (not including gables)								
Tunnel length:	6m (20')	8m (26')	10m (33')	12m (39')	14m (46')	16m (52')	18m (59')	20m (66')
	€500	€595	€690	€785	€880	€975	€1,070	€1,165

Optional upgrade of hoops to 2mm thick steel hoops (heavy duty for exposed areas)								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€178	€222	€267	€311	€356	€400	€445	€489

Option of Triple Aluminium Rail over both end hoops								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€312	€312	€312	€312	€312	€312	€312	€312

Polydome 800 Gauge Polythene								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€271	€308	€344	€380	€416	€453	€489	€525

Configure your Polytunnel:

€.....

€.....

€.....

€.....

## Gable Ends (Choose 2)



Timber Gable, No Door

€82



Timber Gable & PVC Flap

€154



Steel Double Hinged Door

€357



Double Half Doors

€576



Heavy Duty Steel Sliding Door

€741

Front Gable End:

€.....

Rear Gable End:

€.....

Tel: 057 912 0424

[www.polydome.ie](http://www.polydome.ie)

## Popular Features



Crop support bars can be used to tie off plants and they also add 10% to the frame strength

<b>Crop Support Bars</b>								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€88	€132	€176	€220	€264	€308	€352	€396

€.....



Bars along the sides to significantly increase strength in windy areas

<b>Side Purlins</b>								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€100	€126	€160	€186	€221	€247	€281	€307

€.....



Protects polythene from heat and chaffing in windy areas

<b>Anti Hot Spot Tape</b>								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€54	€69	€76	€92	€99	€114	€122	€137

€.....



Alternative to burying polythene

<b>Aluminium Cladding Rails</b>								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€276	€332	€378	€425	€471	€517	€573	€629

€.....



Alternative to using concrete to anchor the steel frame

<b>Fenox Auger Anchorage System</b>								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€283	€328	€382	€427	€481	€526	€580	€625

€.....



Woven polypropylene fabric that suppresses weeds

<b>Ground Cover</b>								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€69	€83	€97	€112	€126	€141	€155	€169

€.....



Sprays water over whole floor area. Auto timers available.

<b>Overhead Irrigation Sprayline</b>								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€104	€104	€104	€120	€120	€120	€120	€120

€.....



Tubing which leaks out water in a controlled way along its length

<b>Fadrip Ground Irrigation</b>								
Tunnel length:	6m	8m	10m	12m	14m	16m	18m	20m
	€157	€171	€176	€197	€216	€237	€251	€256

€.....

Need Help?



Call 057 912 0424

**TOTAL:**

€.....

(All prices include VAT)