

# WARMING PADS

... instant, practical and flexible



The Bio Green warming pad is a plug-in unit that makes propagation easy. The warming pad produces even heat, ideal for excellent germination results. The watertight warming pad is ideal for raising the soil temperature around the roots by approx. 5 – 10°C above ambient temperature. This means that excellent results can be achieved even in cooler places.

It is also suitable for propagating from cuttings or encouraging sensitive plants such as Orchids. To achieve the best conditions for growth, we recommend the TER 2/GB thermostat with remote sensor as an extra. This makes it really easy to set the ideal temperature for different types of seeds, to the exact degree.

To save energy it is worth laying a polystyrene sheet or similar under the warming pad (see illustration).

## Technical data

- Faster germination
- Rapid and strong plant growth
- Can be rolled up
- Available in 3 different sizes
- Can be used with or without thermostat
- IP 67 splashproof
- 2 year guarantee




|  |                 |                      |
|--|-----------------|----------------------|
| Power supply: 230 V                          |                 |                      |
| CE-approved                                  |                 |                      |
| Protective system: IP = 67                   |                 |                      |
| Dimensions                                   | Output          | <b>Order No.:</b>    |
| 25 x 35 cm                                   | 15 W            | <b>WP 025-035/GB</b> |
| 30 x 60 cm                                   | 32 W            | <b>WP 030-060/GB</b> |
| 40 x 65 cm                                   | 42 W            | <b>WP 040-065/GB</b> |
| <b>Thermostat:</b>                           |                 |                      |
| temperature range                            | 0–40°C          |                      |
| Output (max.)                                | 3000W           |                      |
| <b>Order No.:</b>                            | <b>TER 2/GB</b> |                      |
| Completely ready to use, incl. remote sensor |                 |                      |

26

# SOIL HEATING CABLE



... heat where you want it

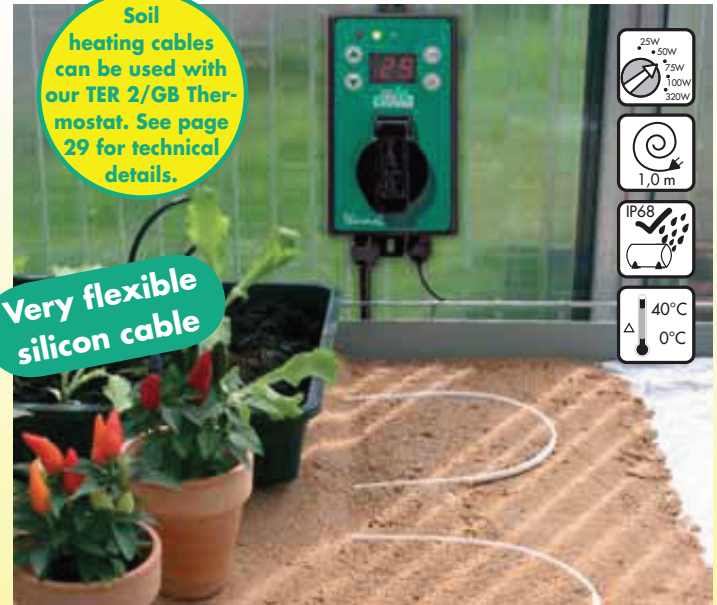

The Bio Green heating cable takes the heat just where you want it. It is particularly suitable for home-made propagators and seed-trays. The cable is very flexible and can easily be laid to suit your particular requirements.

The many different ways of laying and using it make the waterproof cable a universal heat source. Using it with the TER 2/GB thermostat with extra remote sensor makes for ideal propagating conditions, because the soil temperature is accurately controlled.

## Technical data

- Rapid germination
- Faster growth
- Warms the soil by about 8-12°C
- Many applications: Seed propagation, Terrarium or aquarium
- CE-tested
- 2 year guarantee

|   |                 |                     |                   |
|---|-----------------|---------------------|-------------------|
| Power supply: 230 V                             |                 |                     |                   |
| CE-approved                                     |                 |                     |                   |
| Protective system: IP = IP 68                   |                 |                     |                   |
| Length  | Output          | Surface area        | <b>Order No.:</b> |
| 4,3 m   | 25 W            | 0,40 m <sup>2</sup> | <b>HK 4.3/GB</b>  |
| 6 m   | 50 W            | 0,80 m <sup>2</sup> | <b>HK 6.0/GB</b>  |
| 7,5 m   | 75 W            | 1,20 m <sup>2</sup> | <b>HK 7.5/GB</b>  |
| 10 m  | 100 W           | 1,60 m <sup>2</sup> | <b>HK 10.0/GB</b> |
| 25 m  | 320 W           | 4,50 m <sup>2</sup> | <b>HK 25.0/GB</b> |
| <b>Thermostat</b>                               |                 |                     |                   |
| Thermostat temperature range                    | 0-40°C          |                     |                   |
| Output (max.)                                   | 3000 W          |                     |                   |
| <b>Order No.:</b>                               | <b>TER 2/GB</b> |                     |                   |
| Comes complete, ready to use with remote sensor |                 |                     |                   |
| CE-approved                                     |                 |                     |                   |

27